



Installation Guide

Quality, Design and Innovation



home.liebherr.com/fridge-manuals





LIEBHERR




General safety instructions

Contents

1	General safety instructions.....	2
2	Installation conditions.....	3
2.1	Location.....	3
2.2	Building the appliance into kitchen units.....	3
2.3	Installing multiple appliances.....	4
2.4	Mains connection.....	4
3	Installation dimensions.....	5
4	Ventilation requirements.....	5
5	Transporting the device.....	5
6	Unpacking the appliance.....	5
7	Mosquito screens.....	5
7.1	Installing the mosquito screen.....	5
7.2	Removing the mosquito screen.....	6
8	Mounting wall spacers.....	6
9	Setting up the appliance.....	6
10	Setting up the appliance so that it is level.....	7
11	After setting up.....	7
12	Disposing of packaging.....	7
13	What the symbols mean.....	7
14	Door hinge change.....	8
14.1	Removing the upper soft stop mechanism.....	8
14.2	Removing the bottom soft stop mechanism.....	9
14.3	Undoing the cable connection.....	11
14.4	Removing the top door.....	11
14.5	Removing the bottom door.....	12
14.6	Moving the upper bearing parts to the other side.....	12
14.7	Moving the central bearing parts to the other side.....	14
14.8	Moving the lower bearing parts to the other side.....	14
14.9	Moving the door bearing parts to the other side.....	15
14.10	Moving the handles to the other side*.....	16
14.11	Fitting the bottom door.....	17
14.12	Fitting the top door.....	17
14.13	Fitting the cable connection.....	18
14.14	Aligning the doors.....	18
14.15	Fitting the bottom soft stop mechanism.....	19
14.16	Fitting the top soft stop mechanism.....	19
15	Water connection*.....	20
16	Connecting the water supply*.....	20
17	Water filter.....	21
17.1	Inserting the water filter.....	21
18	Connecting device.....	21


The manufacturer is continually working on the further development of all types and models. Please be aware that we reserve the right to make changes to the shape, equipment and technology.

Symbol	Explanation
	Read instructions Please read the information in these instructions carefully to understand all of the benefits of your new appliance.
	Check appliance Check all parts for transport damage. If you have any complaints, please contact your agent or customer service.

Symbol	Explanation
	Differences These instructions apply to a range of models, so differences are possible. Sections that apply to certain models only are marked with an asterisk (*).
	Instructions and results Instructions are marked with a ►. Results are marked with a ▷.
	Videos Videos about the appliances are available on the YouTube channels of Liebherr-Hausgeräte.



1 General safety instructions


- Please keep this assembly manual in a safe place so you can refer back to it at any time.
- If you pass the appliance on, please hand this assembly manual to the next user.
- Read this assembly manual carefully before installation and use to ensure safe and correct use of the appliance. Follow the instructions, safety instructions and warning messages included at all times. They are important for ensuring you can operate and install the appliance safely and without any problems.
- First read the general safety instructions in the “General safety instructions” section of the **operating instructions**, which accompany these installation instructions, and follow them. If you cannot find the **operating instructions**, you can download the **operating instructions** from the internet by entering the service number at home.liebherr.com/fridge-manuals. The service number can be found on the serial



tag:

- **Observe the warning messages and other detailed information in the other sections when installing the appliance:**

	DANGER	identifies a situation involving direct danger which, if not obviated, may result in death or severe bodily injury.
	WARNING	identifies a dangerous situation which, if not obviated, may result in death or severe bodily injury.

	CAUTION	identifies a dangerous situation which, if not obviated, may result in minor or medium bodily injury.
	NOTICE	identifies a dangerous situation which, if not obviated, may result in damage to property.
	Note	identifies useful instructions and tips.

2 Installation conditions



WARNING

Fire hazard due to dampness!

If live parts or the mains lead become damp this may cause short circuits.

- The appliance is designed for use in enclosed areas. Do not operate the appliance outdoors or in areas where it is exposed to splash water or damp conditions.

Intended use

- Install and use the appliance in indoor spaces only.

2.1 Location



WARNING

Leaking coolant and oil!

Fire. The coolant contained in the appliance is eco-friendly, but also flammable. The oil contained in the appliance is flammable. Escaping coolant and oil can ignite if the concentration is high enough and in contact with an external heat source.

- Do not damage the pipelines of the coolant circuit and the compressor.

- If the appliance is installed in a very humid environment, condensation can build up on the outside of the unit. Always make sure the installation location is well ventilated.
- The more coolant there is in the appliance, the larger the space that it is installed in must be. If the space is too small, any leak may create a flammable mixture of gas and air. For every 8 g of refrigerant, the installation space must be at least 1 m³. Information regarding the coolant can be found on the serial tag inside the appliance.

2.1.1 Supporting floor

- The floor of the installation site must be horizontal and even.
- The surface supporting the appliance must be at the same level as the surrounding floor.

2.1.2 Positioning

- Do not install the appliance in direct sunlight, next to an oven, radiator or similar.
- Install the appliance with the rear panel up against the wall and always use the supplied wall spacers (see below).

2.2 Building the appliance into kitchen units

The appliance can be built into kitchen units.

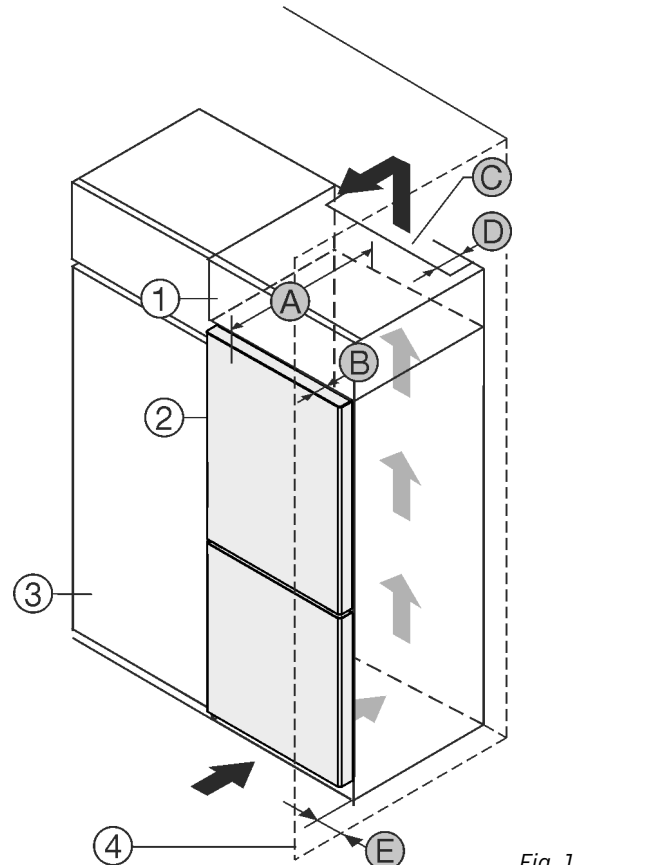


Fig. 1

(1) Top cupboard*

(2) Appliance*

(3) Kitchen cabinet*

(4) Wall*

(B) Door depth*

(C) Ventilation cross section*

(D) Distance to the back of the appliance*

(E) Distance to the side of the appliance*

(A) Appliance depth*

Set up the appliance directly next to the kitchen cabinet Fig. 1 (3)*.

There must be a ventilation shaft at the depth Fig. 1 (D) of the back of the top cupboard over the entire width of the top cupboard.*

The ventilation cross-section Fig. 1 (C) must be maintained under the ceiling.*

If the appliance is set up with the hinges next to a wall Fig. 1 (4), the distance between the appliance and the wall must be at least 13 mm.*

If the appliance is set up with the hinges next to a wall Fig. 1 (4), the distance between the appliance and the wall must be at least 20 mm.*

In order to be able to fully open the door, the appliance must protrude by the depth of the door Fig. 1 (B) from the front of the kitchen cabinet. The appliance may protrude further depending on the depth of the kitchen cabinets Fig. 1 (3) and whether wall spacers are used.*


A*	B*	C*	D*	E*
675 mm*	75 mm	Min. 300 cm ²	Min.50 mm	Min.13 mm

Appliances without handle / with recessed grip

A*	B*	C*	D*	E*
682 mm*	82 mm	Min. 300 cm ²	Min.50 mm	Min.20 mm

Appliances with recessed grip and glass/stone front

Installation conditions

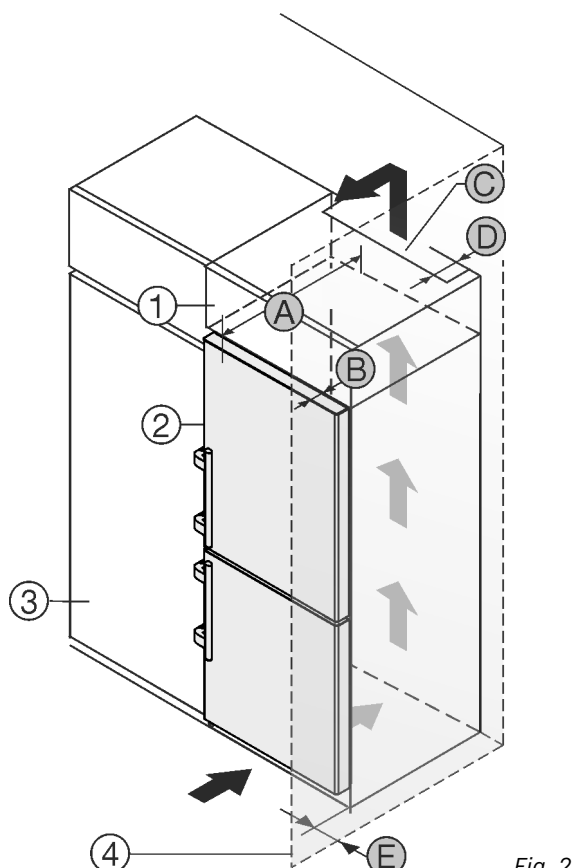

- (1)** Top cabinet*
(2) Appliance*
(3) Kitchen cabinet*
(4) Wall*
(A) Appliance depth*
(B) Door depth*
(C) Ventilation cross section*
(D) Distance to the back of the appliance*
(E) Distance to the side of the appliance*

Fig. 2

Set up the appliance directly next to the kitchen cabinet Fig. 2 (3).*

There must be a ventilation shaft at the depth Fig. 2 (D) of the back of the top cupboard over the entire width of the top cupboard.*

The ventilation cross-section Fig. 2 (C) must be maintained under the ceiling.*

If the appliance is set up with the hinges next to a wall Fig. 2 (4), the distance between the appliance and the wall must be at least 57 mm. This is how far the handle protrudes when the door is open.*

In order to be able to fully open the door, the appliance must protrude by the depth of the door Fig. 2 (B) from the front of the kitchen cabinet. The appliance may protrude further depending on the depth of the kitchen cabinets Fig. 2 (3) and whether wall spacers are used.*

A*	B*	C*	D*	E*
675 mm*	75 mm	Min. 300 cm ²	Min.50 mm	Min.57 mm

Appliances with lever handle

Note

Please contact Customer Services to acquire a kit to limit the door opening angle to 90° for appliances with soft close mechanisms.

Ensure that the following conditions are met:

- Recess dimensions are adhered to .
- Ventilation requirements are complied with (see 4 Ventilation requirements) .

2.3 Installing multiple appliances

NOTICE

Risk of damage due to condensate!

- Do not install the appliance directly alongside a further refrigerator/freezer.

These appliances are designed for a variety of installation options. Combine appliances only if the appliance is suitable. The following table shows the installation options by model:

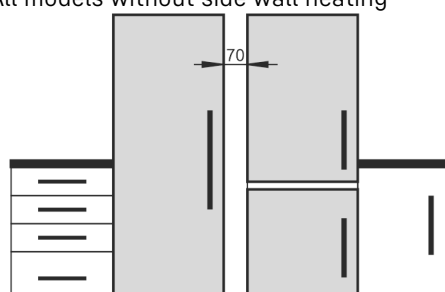
Installation option	Model
Single	All models
Side-by-side (SBS)	Model names starting with S...
Side-by-side with a gap of 70 mm between appliances Otherwise condensation will build up between the units.	All models without side wall heating 

Fig. 3

Assemble the appliances together, following their specific installation instructions.

2.4 Mains connection



WARNING

Danger of fire due to incorrect positioning!

If the mains cable or plug touches the back of the appliance, the vibration can damage the mains cable or the plug resulting in a short circuit.

- Make sure the mains cable is not trapped under the appliance when you position the appliance.
- Stand the appliance so that it is not touched by connectors or main cables.
- Do not connect any appliances to sockets in the area of the back of the appliance.
- Do **not** place and operate multi-sockets/power distributors and other electronic devices (such as halogen transformers) at the back of the appliances.

3 Installation dimensions

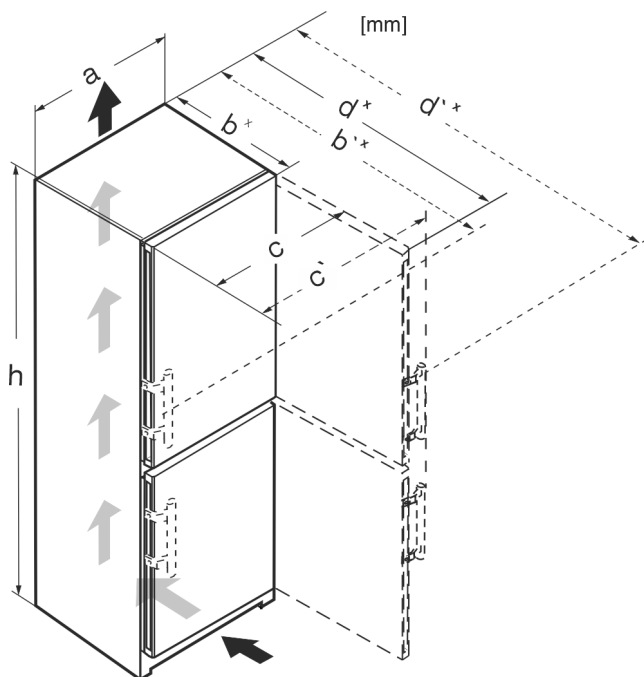


Fig. 4

	h	a	b	b'	c	c'	d	d'
CN(sdd)(d) 5253	1855	597	675 ^x	719 ^x	609	654	1215 ^x	1222 ^x
SCN(sdd)(sdh) 5253	1855	597	675 ^x	719 ^x	609	654	1215 ^x	1222 ^x
SBN(sdd)(sdh) 5264	1855	597	675 ^x	719 ^x	609	654	1215 ^x	1222 ^x
CN(sdd)(sdb)(d) 5753 / 5763	2015	597	675 ^x	719 ^x	609	654	1215 ^x	1222 ^x
CBN(sdb)(sdc) 5753	2015	597	675 ^x	719 ^x	609	654	1215 ^x	1222 ^x
CBNbsd 576i	2015	597	675 ^x	719 ^x	609	654	1215 ^x	1222 ^x
CBN(std)(bsd) 578i / 5783 / 579i	2015	597	675 ^x	—	609	—	1217 ^x	—
CBNsgd 5773	2015	597	682 ^x	—	609	—	1217 ^x	—
CN(d)(sdd) 7753 / 7763	2015	747	675 ^x	719 ^x	759	804	1365 ^x	1372 ^x
CBN(sdc)(sdh) 7653	1855	747	675 ^x	719 ^x	759	804	1365 ^x	1372 ^x
CBN(bed)(sdc) 7753	2015	747	675 ^x	719 ^x	759	804	1365 ^x	1372 ^x
CBN(bsc)(stc) 778i	2015	747	675 ^x	—	759	—	1367 ^x	—

^x For appliances with supplied wall spacers, the dimensions must be increased by 15 mm.

4 Ventilation requirements

NOTICE

Danger of overheating due to insufficient air ventilation! The compressor may be damaged if there is insufficient air ventilation.

- Take care to ensure adequate air ventilation.
- Observe the ventilation requirements.

If the appliance is integrated into a fitted kitchen, the following ventilation requirements must be adhered to:

- There are spacer fins at the back of the appliance to provide sufficient ventilation. Make sure that these are not positioned in recesses or openings.
- As a rule, the larger the ventilation space the more efficiently the appliance can run.

5 Transporting the device

- Transport the appliance in its packaging.
- Transport the appliance upright.
- Use two people to transport the appliance.

6 Unpacking the appliance

Before you connect the appliance, report any damage immediately to the delivery company.

- Check the appliance and the packaging for damage during transport. Contact the supplier immediately if you suspect any level of damage.
- Remove all materials from the back or the side walls of the appliance that may prevent proper installation or ventilation.
- Remove all protective films from the appliance. Do not use sharp or pointed objects for this.

7 Mosquito screens

The mosquito screens ensure proper functioning of the appliance by providing optimum protection against small insects.

If a mosquito screen is included in the appliance scope of delivery, fit the mosquito screen according to the description. If you have problems when installing the mosquito screen, contact customer service (see operating instructions, Customer Service).



CAUTION

Risk of injury and damage due to the appliance falling down.

- The appliance must be held and tilted by two people.

Make sure the following prerequisites are met:

- ☐ The appliance is switched off.
- ☐ The appliance is not loaded.
- ☐ The appliance is tilted by two people.

7.1 Installing the mosquito screen

- Tilt the appliance slightly backwards with the help of another person.

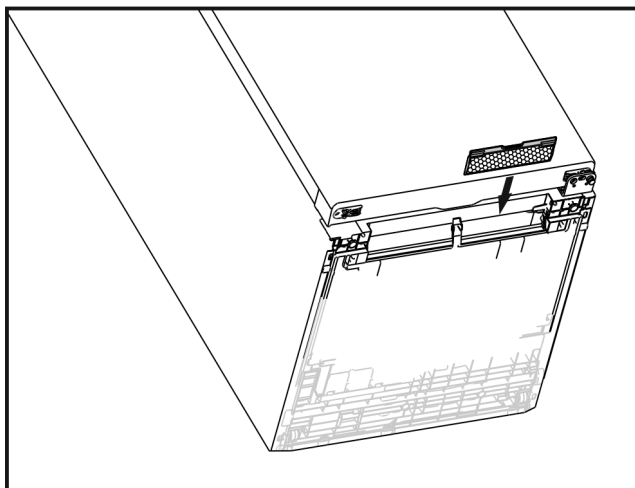


Fig. 5

- Slide the mosquito screen in as shown in the diagram (see Fig. 59) .

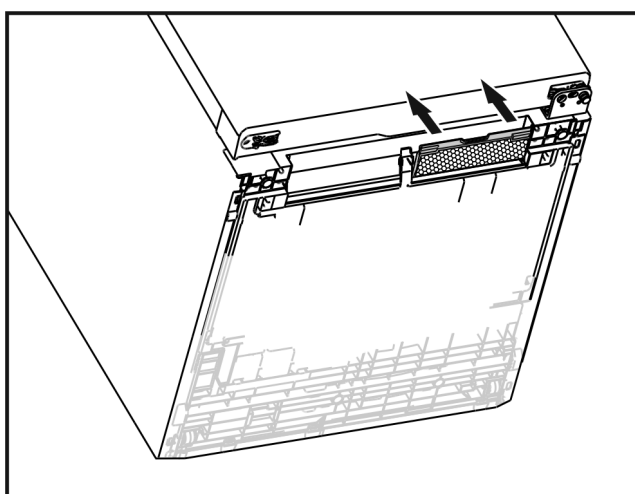


Fig. 6

- Press the mosquito screen on both sides of the appliance until it clicks into place (see Fig. 60) .
- Fit the second screen in the same way.
- Set the appliance upright again.

7.2 Removing the mosquito screen

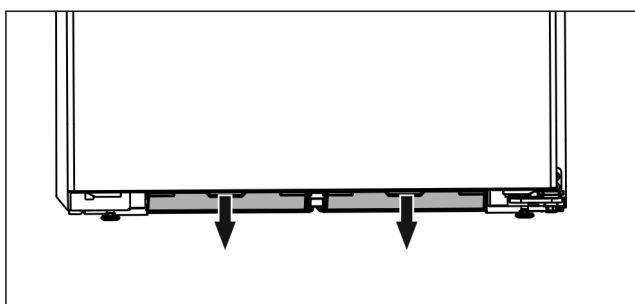



Fig. 7

- Press down on the centre of the screens until they click out of place.
- Clean the mosquito screens (see operating instructions, cleaning the appliance).
- Refit the mosquito screens.

8 Mounting wall spacers

The wall spacers must be used to achieve the declared energy consumption value and to prevent condensation in the event of high surrounding humidity. This increases the appliance depth by approx. 15 mm. The appliance will work perfectly well without the spacers but will consume slightly more energy.

- If your appliance is supplied with wall spacers, mount these on the back of the appliance, bottom left and right.



9 Setting up the appliance



CAUTION

Risk of injury!

- The appliance must be transported to its place of installation by two people.



CAUTION

Risk of injury and damage!

The door may strike the wall and be damaged as a result. In the case of glass doors, the damaged glass may cause injuries!

- Protect the glass door from striking against the wall. Fit a door stop, e.g. one made of felt, to the wall.
- A limiter restricting door opening to 90° can be ordered from the aftersales service.



WARNING

Unstable appliance!

Risk of injury and damage. The appliance can topple over.

- Attach the appliance according to the operating instructions.



WARNING

Fire hazard and danger of damage!

- Do not place appliances emitting heat e.g. microwaves, toasters etc. on the appliance!

Ensure that the following conditions are met:

- ☐ Only move the device when it is not loaded.
- ☐ Only set up the appliance when someone is available to help.

10 Setting up the appliance so that it is level



CAUTION


Risk of injury or damage from the appliance tipping or the door falling open!

If the additional adjustable foot on the base support is not correctly positioned on the floor, there is a risk of the door falling open or the appliance tipping. This can lead to injury or property damage.

- Unscrew the additional adjustable foot on the support until it reaches the floor.
- Then turn it another 90°.

- Set up the appliance so that it is level using the supplied open-ended wrench to turn the adjustable feet (A) and a spirit level.

- Then prop up the door: Turn the adjustable foot (B) on the bearing bracket until it comes into contact with the floor, then turn an additional 90°.

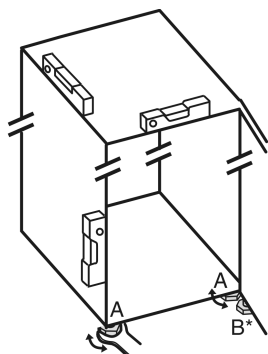

- Then prop up the door: Turn the adjustable foot on the bearing bracket (B) using the open-ended wrench SW10 until it comes into contact with the floor, then turn an additional 90°.

11 After setting up

- Take off the protective film from the exterior of the appliance.
- Take off the protective film from the trim panels.
- Take off the protective film from the trim panels and drawer fronts.
- Take off the protective film from the stainless steel rear panel.
- Remove all transport safety components.
- Clean the appliance .
- Note the type (model, number), appliance designation, appliance/serial number, purchase date and dealer's address in the fields provided for this .

12 Disposing of packaging



WARNING

Danger of suffocation due to packing material and plastic film!

- Do not allow children to play with packing material.

The packaging is made of recyclable materials:

- corrugated board/cardboard
- expanded polystyrene parts
- polythene bags and sheets
- polypropylene straps
- nailed wooden frame with polyethylene panel*











- Take the packaging material to an official collecting point.



13 What the symbols mean

	Risk of injury here! Follow the safety notes!
	These instructions apply to a range of models. Follow this step only if it applies to your appliance.
	To install, please follow the detailed description in the Guide.
	This section applies either to a single-door appliance or a double-door appliance.
	Choose one of the options: Appliance with right-hinged door or appliance with left-hinged door.
	Installation step required if your model has IceMaker and/or Infinity-Spring.
	Just loosen the screws or tighten them slightly.
	Tighten the screws.
	Check to see if the next step applies for your model.
	Check the correct assembly/seat of the components used.
	Measure the specified measurement and adjust if necessary.
	Tool for assembly: Metre rule
	Tool for assembly: Cordless screwdriver and attachments
	Tool for assembly: Spirit level

Door hinge change

	Tool for assembly: Size 7 and size 10 spanners
	Two people are required for this step.
	Carry out this step at the marked place on the appliance.
	Aids for assembly: String
	Aids for assembly: Square
	Aids for assembly: Screwdriver
	Aids for assembly: Scissors
	Aids for assembly: Non-permanent marker pen
	Accessory kit: Remove components
	Dispose of components that are no longer needed.

14 Door hinge change

Tools

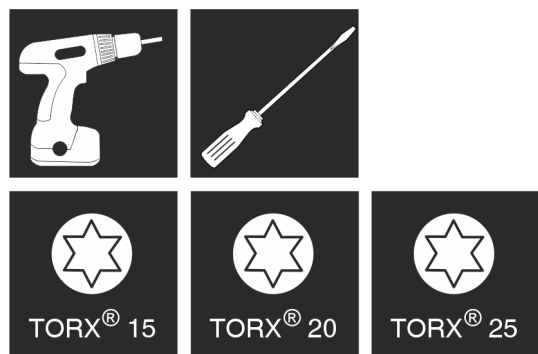


Fig. 8



WARNING

Danger of injury due to door falling out!

If the bearing parts are not screwed on tightly enough, the door may fall out. This can result in serious injuries. In addition, the door may not close with the result that the appliance does not cool properly.

- Die Lagerböcke/Lagerbolzen fest mit 4 Nm anschrauben.
- Check all screws and retighten them if necessary.

NOTICE

Risk of condensation damage for Side-by-Side appliances! Certain appliances can be set up as Side-by-Side combinations (two appliances next to each other).

If your appliance is a **Side-by-Side (SBS) appliance**:

- Set up the SBS combination in accordance with the enclosed document.

If the **positioning of the devices is stipulated**:

- Do not change the door hinges over.

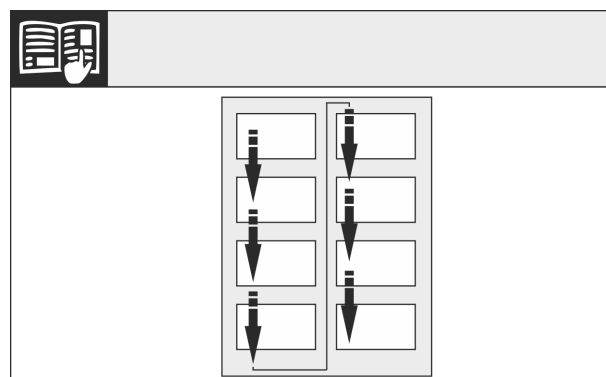


Fig. 9

Remember the reading direction.

14.1 Removing the upper soft stop mechanism

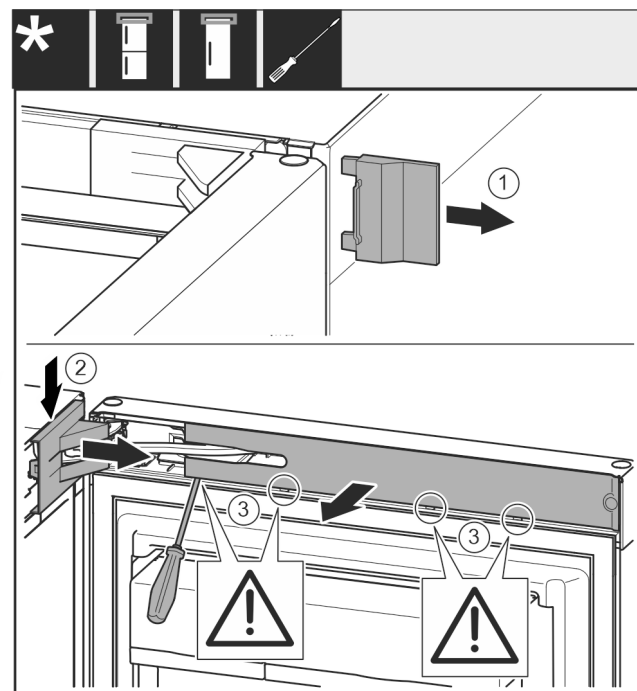


Fig. 10

- Open the top door.

NOTICE

Risk of damage!

If the door seal is damaged, the door may fail to close properly and the cooling will be inadequate.

► Do not damage the door seal with the screwdriver!

- Remove the outer cover. *Fig. 10 (1)*
- Disengage and release the bearing bracket cover. Remove the bearing bracket cover. *Fig. 10 (2)*
- Unlatch the panel with a slotted screwdriver and swivel it to one side. *Fig. 10 (3)*

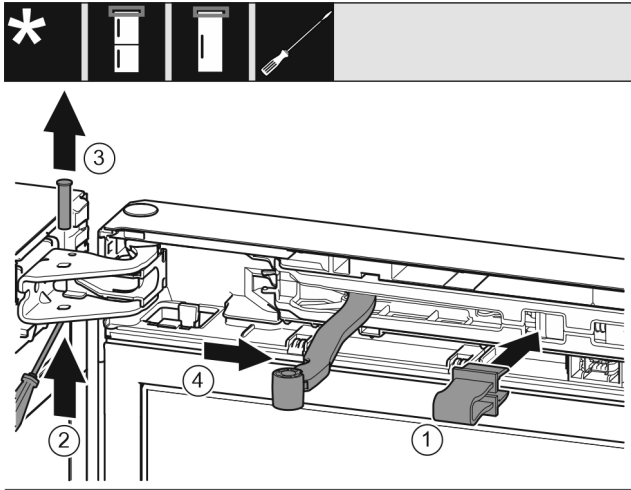


Fig. 11



CAUTION

Crushing hazard by joint folding up!

► Engage safety device.

- Engage the locking device in the opening. *Fig. 11 (1)*
- Push out the bolt with a screwdriver. *Fig. 11 (2)*
- Remove the bolt upwards. *Fig. 11 (3)*
- Turn the hinge in the direction of the door. *Fig. 11 (4)*

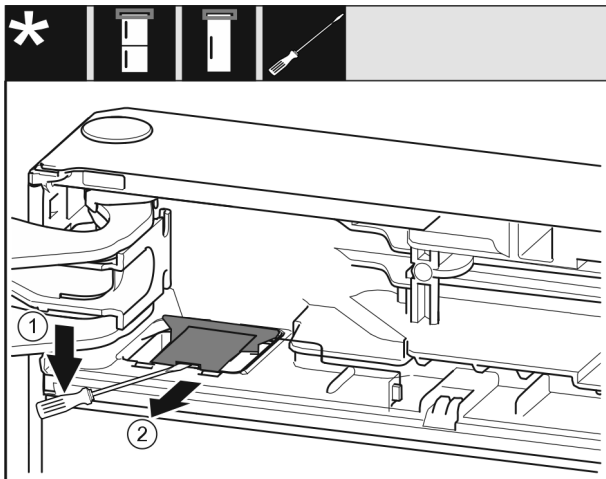


Fig. 12

- Unlatch the cover with a slotted screwdriver and lift it up. *Fig. 12 (1)*
- Take out the cover. *Fig. 12 (2)*

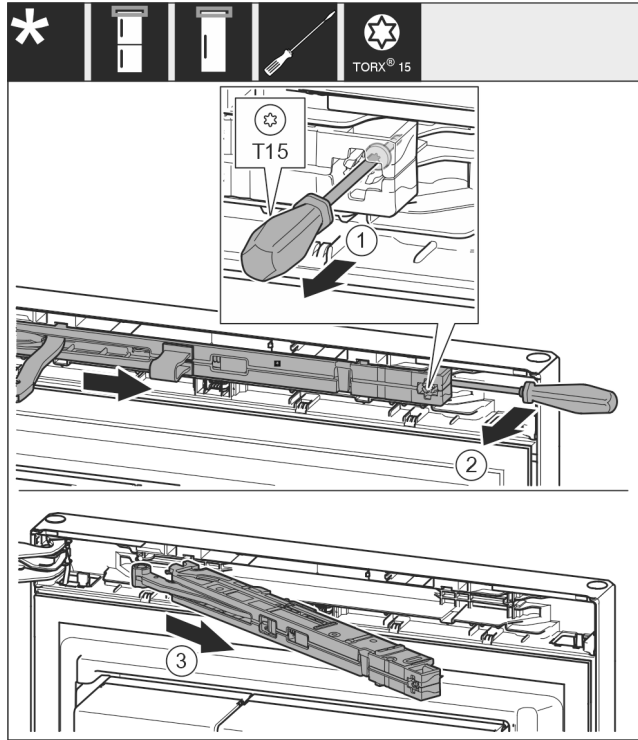


Fig. 13

- Loosen the soft stop mechanism screw with a T15 screwdriver approx. 14 mm. *Fig. 13 (1)*
- Insert a screwdriver behind the soft stop mechanism on the handle side and rotate the unit forwards. *Fig. 13 (2)*
- Remove the soft stop mechanism. *Fig. 13 (3)*

14.2 Removing the bottom soft stop mechanism

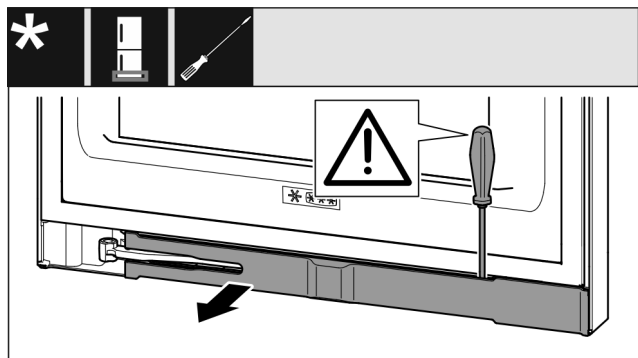


Fig. 14

- Open the bottom door.

NOTICE

Risk of damage!

If the door seal is damaged, the door may fail to close properly and the cooling will be inadequate.

► Do not damage the door seal with the screwdriver!

- Unlatch the panel with a slotted screwdriver and swivel it to one side *Fig. 14 (1)*.

Door hinge change

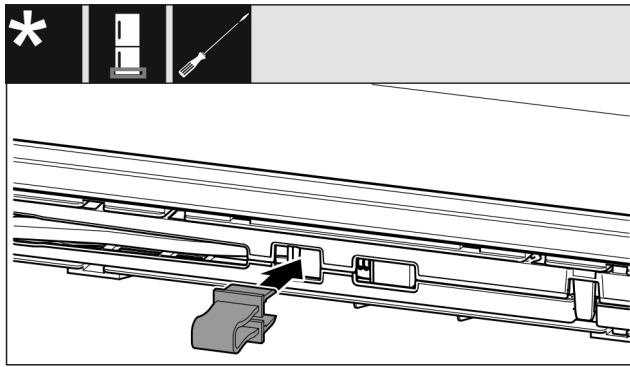


Fig. 15



CAUTION

Crushing hazard by joint folding up!

► Engage safety device.

► Engage the locking device in the opening Fig. 15 ().

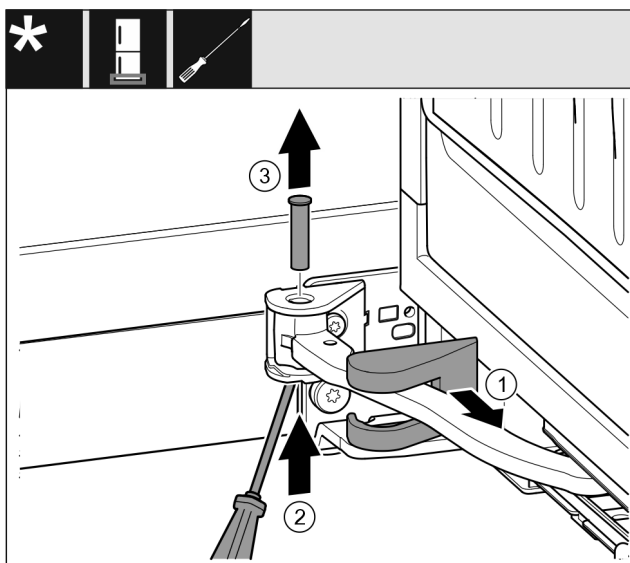


Fig. 16

- Remove the bearing bracket cover and push it along the hinge. Fig. 16 (1)
- Lift the bolt with a finger or screwdriver from below. Fig. 16 (2)
- Insert the screwdriver under the bolt head and pull it out. Fig. 16 (3)

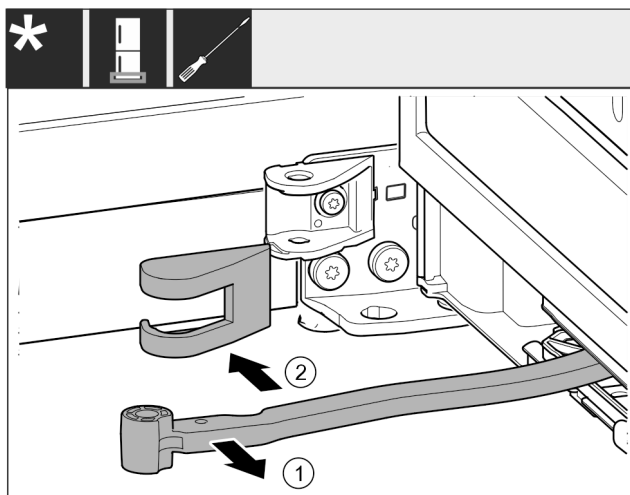


Fig. 17

- Turn the hinge in the direction of the door. Fig. 17 (1)

► Remove the bearing bracket cover. Fig. 17 (2)

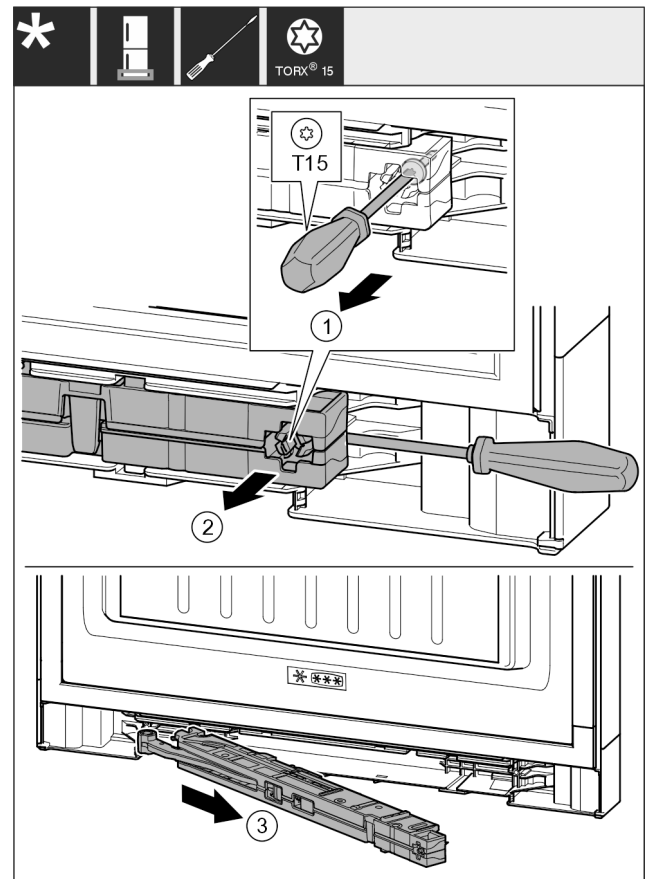


Fig. 18

- Undo the soft stop mechanism screw with a T15 screwdriver approx. 14 mm. Fig. 18 (1)
- Insert the screwdriver on the handle side behind the soft stop mechanism. Turn the unit forwards. Fig. 18 (2)
- Pull out the unit. Fig. 18 (3)
- Place the soft stop mechanism to one side.

14.3 Undoing the cable connection

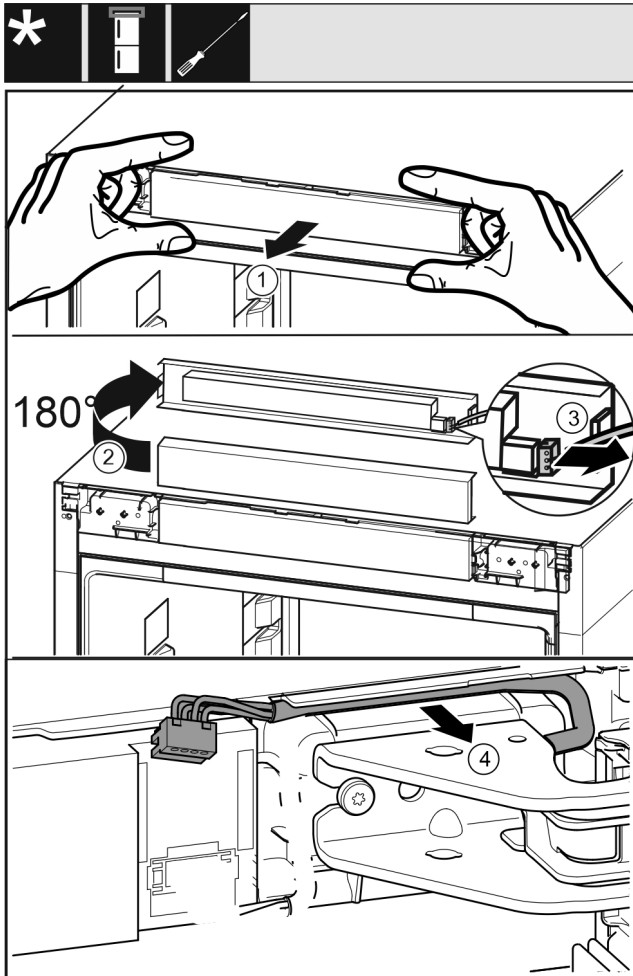


Fig. 19

- Pull out the control panel of the appliance to the front carefully. Fig. 19 (1)
- Turn the control panel upwards by 180°. Fig. 19 (2)
- Push the latching lug back and pull out the plug carefully. Fig. 19 (3)
- Carefully pull out the cable over the bearing bracket out of the guide. Fig. 19 (4)

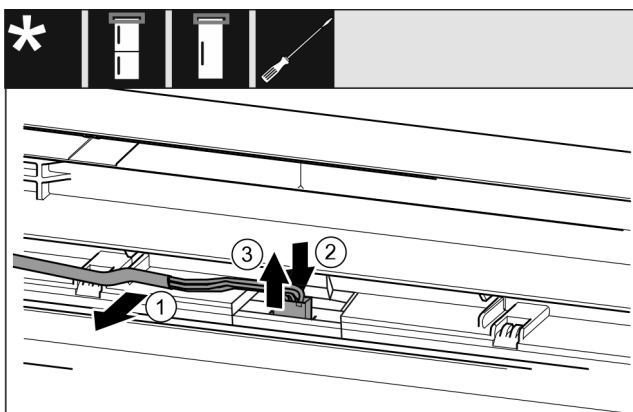


Fig. 20

- Carefully release the grey cable from the guide in the door. Fig. 20 (1)
- Push back the lug behind the plug. Fig. 20 (2)
- Pull out the plug carefully upwards. Fig. 20 (3)

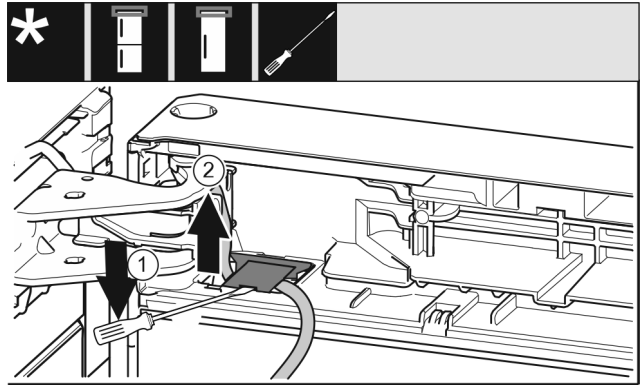


Fig. 21

- Lift up the cover with a screwdriver and pull it out. Fig. 21 (1)
- Pull out the cable. Fig. 21 (2)

14.4 Removing the top door

Note

- Remove any food from the door racks before removing the door, so that no food falls out.

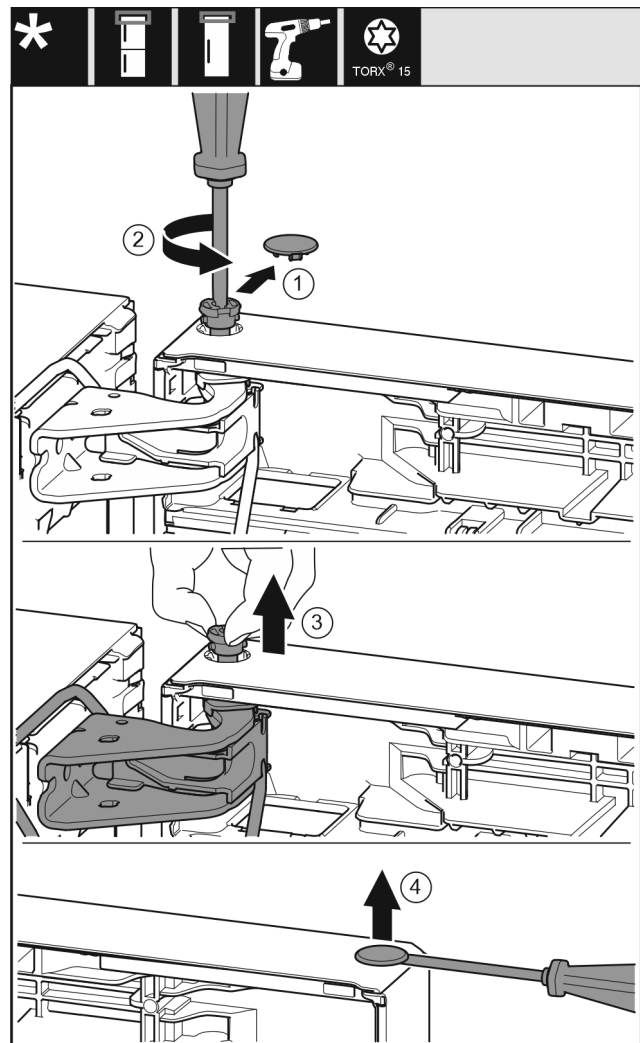


Fig. 22

Door hinge change



CAUTION

Risk of injury if the door tips!

- Take good hold of the door.
- Set down the door carefully.

- Carefully remove the protective cover. *Fig. 22 (1)*
- Undo the bolt a little with a T15 screwdriver. *Fig. 22 (2)*
- Hold the door and remove the bolts with your fingers. *Fig. 22 (3)*
- Lift the door and place it to one side.
- Carefully lift the plugs out of the door bearing bush with a slotted screwdriver and pull them out. *Fig. 22 (4)*

14.5 Removing the bottom door

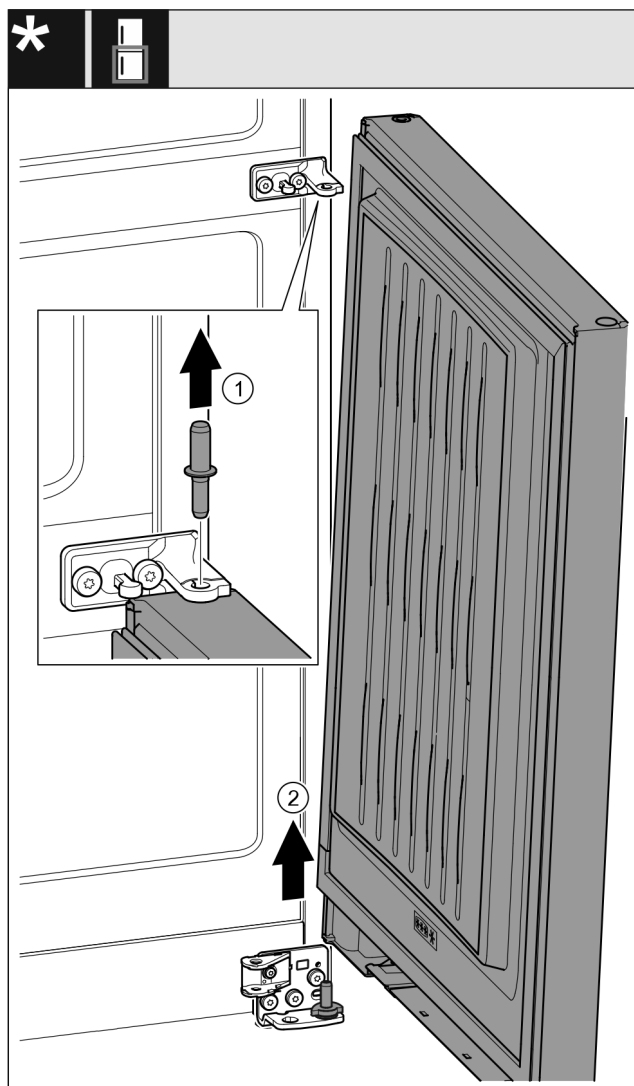


Fig. 23 *



CAUTION

Risk of injury if the door tips!

- Take good hold of the door.
- Set down the door carefully.

- Pull out the bolts upwards. *Fig. 23 (1)**
- Swing the door out, pull it upwards and place it to one side. *Fig. 23 (2)**

14.6 Moving the upper bearing parts to the other side

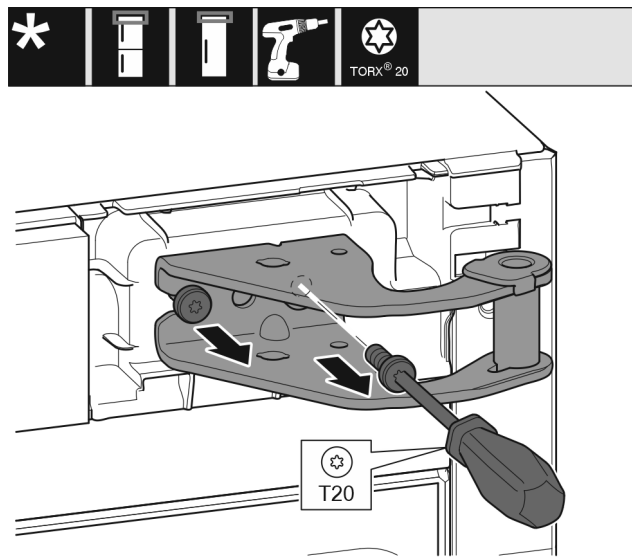


Fig. 24

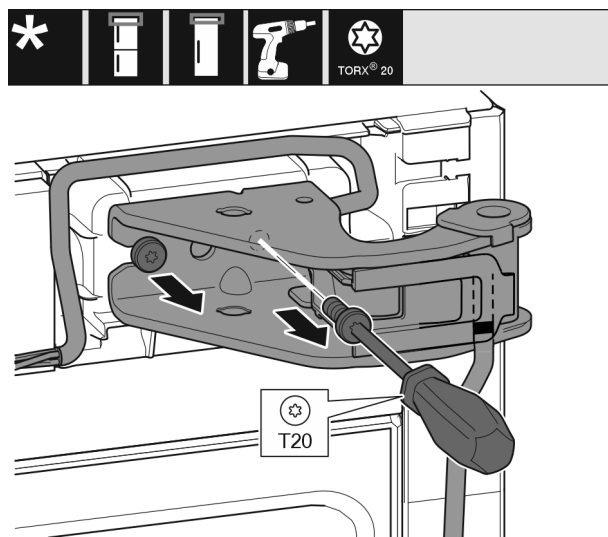


Fig. 25

- Remove both screws with a T20 screwdriver.
- Lift up and remove the bearing bracket.
- Lift up and remove the bearing bracket and cable.

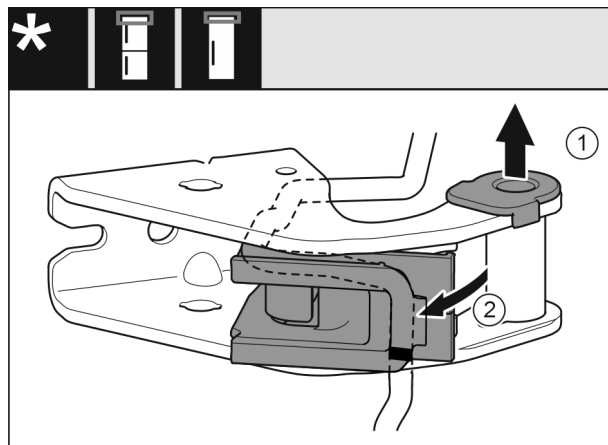


Fig. 26

- Pull the bearing bush out of the guide. *Fig. 26 (1)*
- Swing the cable holder out. *Fig. 26 (2)*

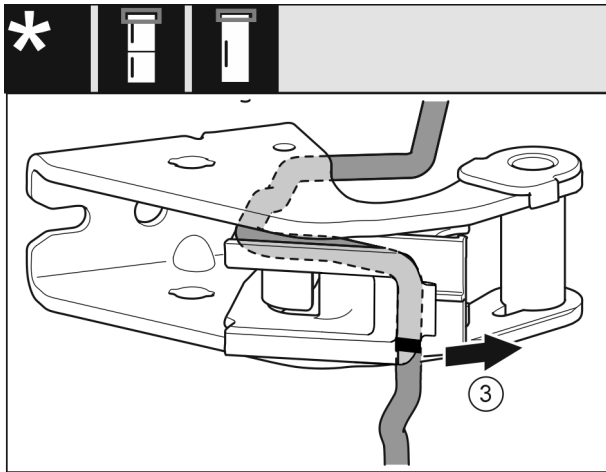


Fig. 27

- Remove the cable with the cable holder from the bearing bracket. Fig. 27 (3)

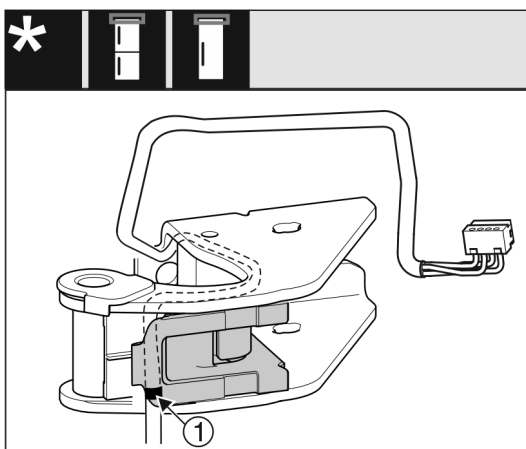


Fig. 28

- Insert the cable mirror-inverted in the upper groove of the cable holder.
- The middle marking must be positioned on the edge of the cable holder Fig. 28 (1).
- Swing in the cable holder.

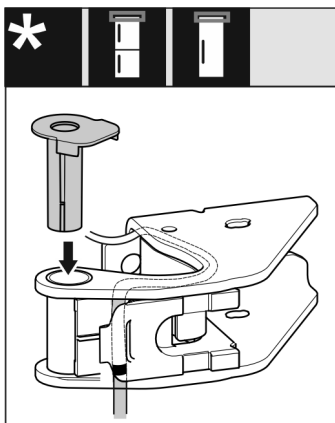


Fig. 29

- Insert the bearing bush from the other side and latch it into place.

NOTICE

Danger of cable crushing

- Pay attention to the markings when routing the cable. The cable end with the double marking must be routed into the door end piece.

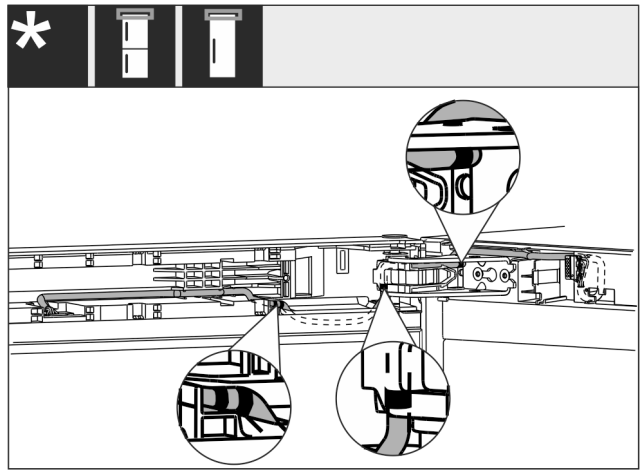


Fig. 30

After making the change, the cable routing must be as shown in the illustration.

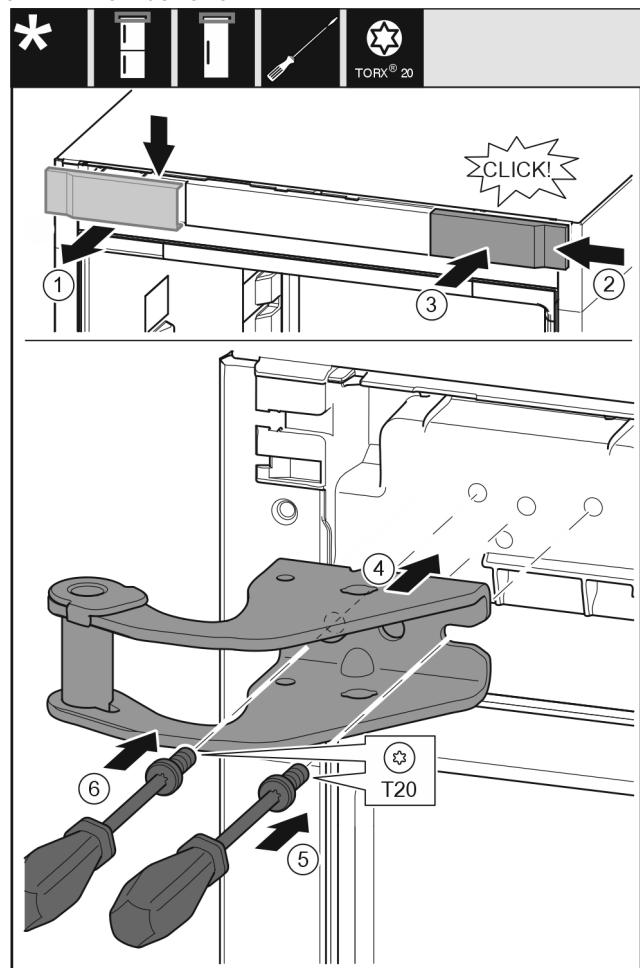


Fig. 31

- Take off the cover from above to the front. Fig. 31 (1)
- Rotate the cover 180° and clip onto the other side from the right. Fig. 31 (2)
- Latch the cover into place. Fig. 31 (3)
- Position the upper bearing bracket. Fig. 31 (4)
- Insert the screw with a T20 screwdriver and tighten it. Fig. 31 (5)
- Insert the screw with a T20 screwdriver and tighten it. Fig. 31 (6)

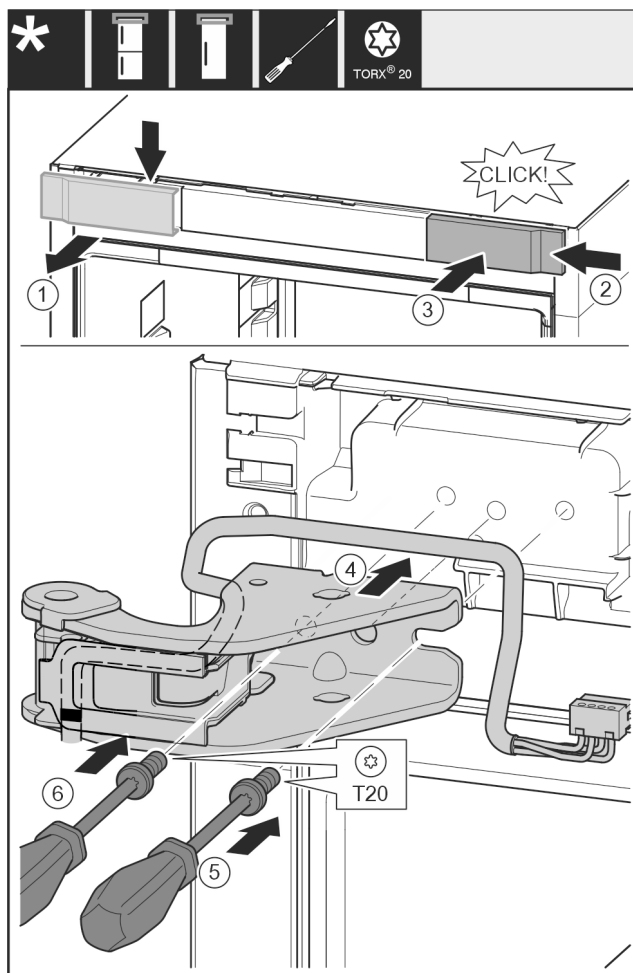


Fig. 32

- ▶ Take off the cover from above to the front. Fig. 32 (1)
- ▶ Rotate the cover 180° and clip onto the other side from the right. Fig. 32 (2)
- ▶ Latch the cover into place. Fig. 32 (3)
- ▶ Position the upper bearing bracket. Fig. 32 (4)
- ▶ Insert the screw with a T20 screwdriver and tighten it. Fig. 32 (5)
- ▶ Insert the screw with a T20 screwdriver and tighten it. Fig. 32 (6)

14.7 Moving the central bearing parts to the other side

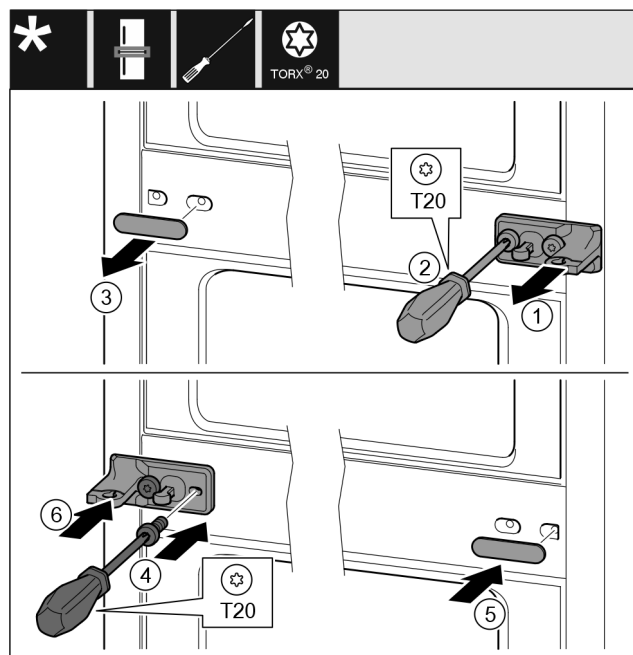


Fig. 33

- ▶ Take off the washer. Fig. 33 (1)
- ▶ Remove the screws with a T20 screwdriver. Fig. 33 (2)
- ▶ Take off the cover carefully. Fig. 33 (3)
- ▶ Screw the bearing bracket and the film rotated 180° firmly onto the other side. Fig. 33 (4)
- ▶ Attach the cover rotated 180° onto the other side. Fig. 33 (5)
- ▶ Push the washer on from the front. Fig. 33 (6)

14.8 Moving the lower bearing parts to the other side

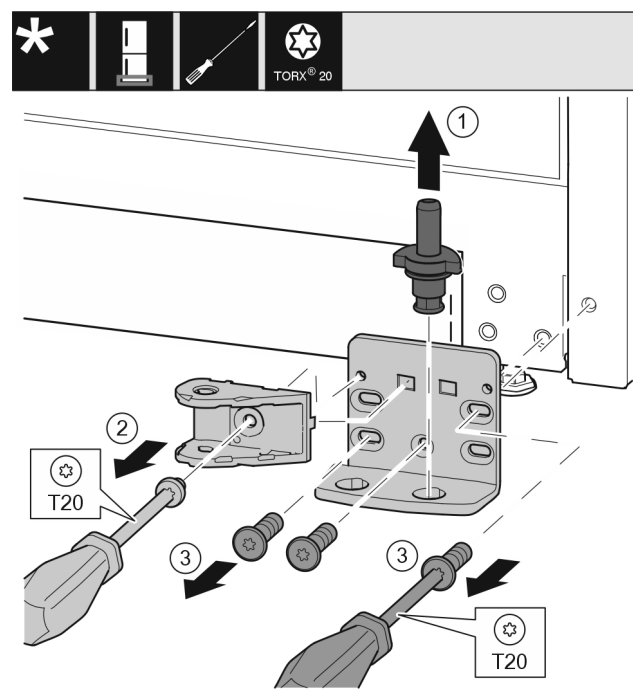


Fig. 34

- ▶ Lift the bearing pin completely upward and pull it out. Fig. 34 (1)
- ▶ Take out the screw with a T20 screwdriver and take off the soft stop connection. Fig. 34 (2)

- Take out the screws with a T20 screwdriver and take off the bearing bracket. *Fig. 34 (3)*

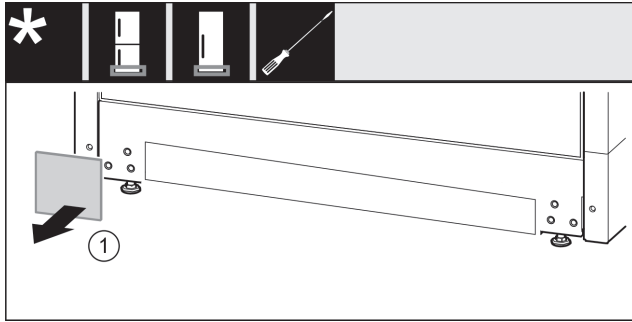


Fig. 35

- Remove the cover. *Fig. 35 (1)*

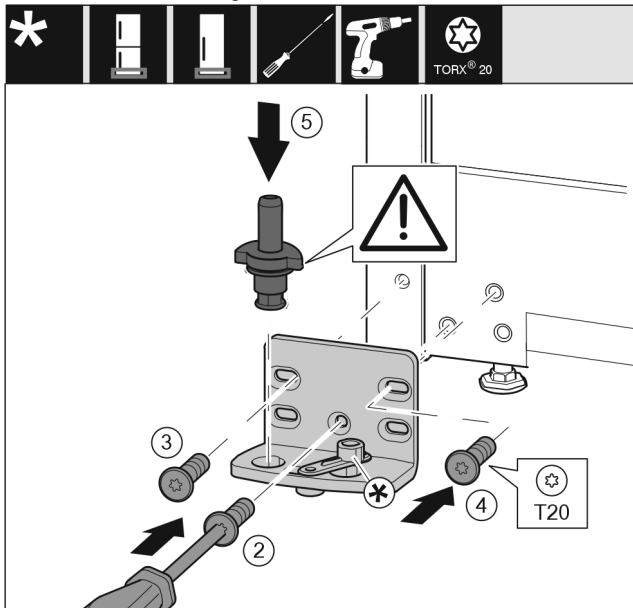


Fig. 36

- Place the bearing bracket on the other side and screw it on with a T20 screwdriver. Start with screw 2 at the bottom in the middle. *Fig. 36 (2)*
- Screw in screws 3 and 4 tightly. *Fig. 36 (3,4)*
- Insert the bearing pin completely. Make sure that the latching lug is pointing to the rear. *Fig. 36 (5)*
- Place the bearing bracket on the other side and screw it on with a T20 screwdriver. Start with screw 2 at the bottom in the middle. *(2)*
- Screw in screws 3 and 4 tightly. *(3,4)*
- Rotate the soft stop connection 180°. Screw it in with a T20 screwdriver on the other side of the bearing bracket. *(5)*
- Insert the bearing pin completely. Make sure that the latching lug is pointing to the rear. *(6)*

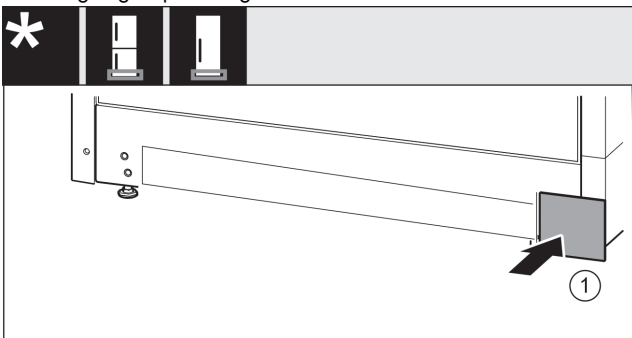


Fig. 37

- Put the cover back on the other side. *Fig. 37 (1)*

14.9 Moving the door bearing parts to the other side

Top of door

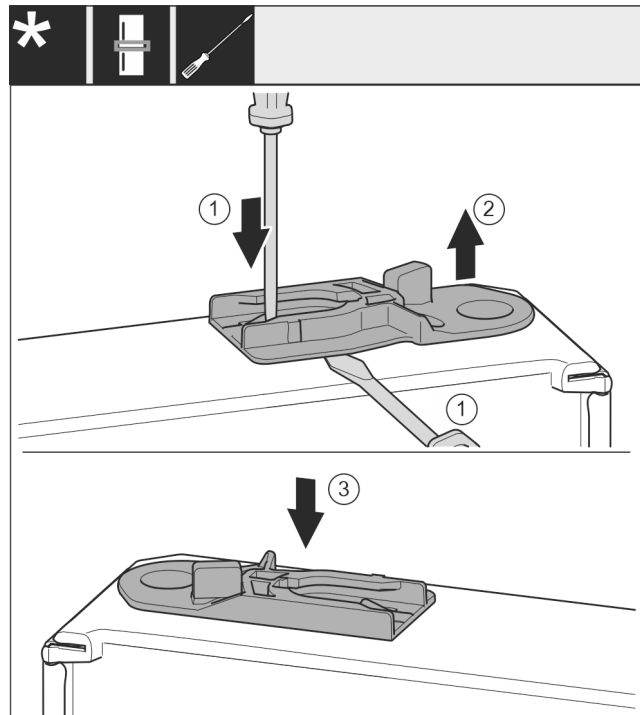


Fig. 38

- The bottom side of door faces upwards: Turn the door.
- Pull out the guide bush: Press the lug with a slotted screwdriver and, at the same time, insert the slotted screwdriver under the guide bush. *Fig. 38 (1, 2)*
- Slide the guide bush included in the scope of supply to the other side of the housing. *Fig. 38 (3)*
- The upper side of door faces upwards: Turn the door.

Door hinge change

14.10 Moving the handles to the other side*

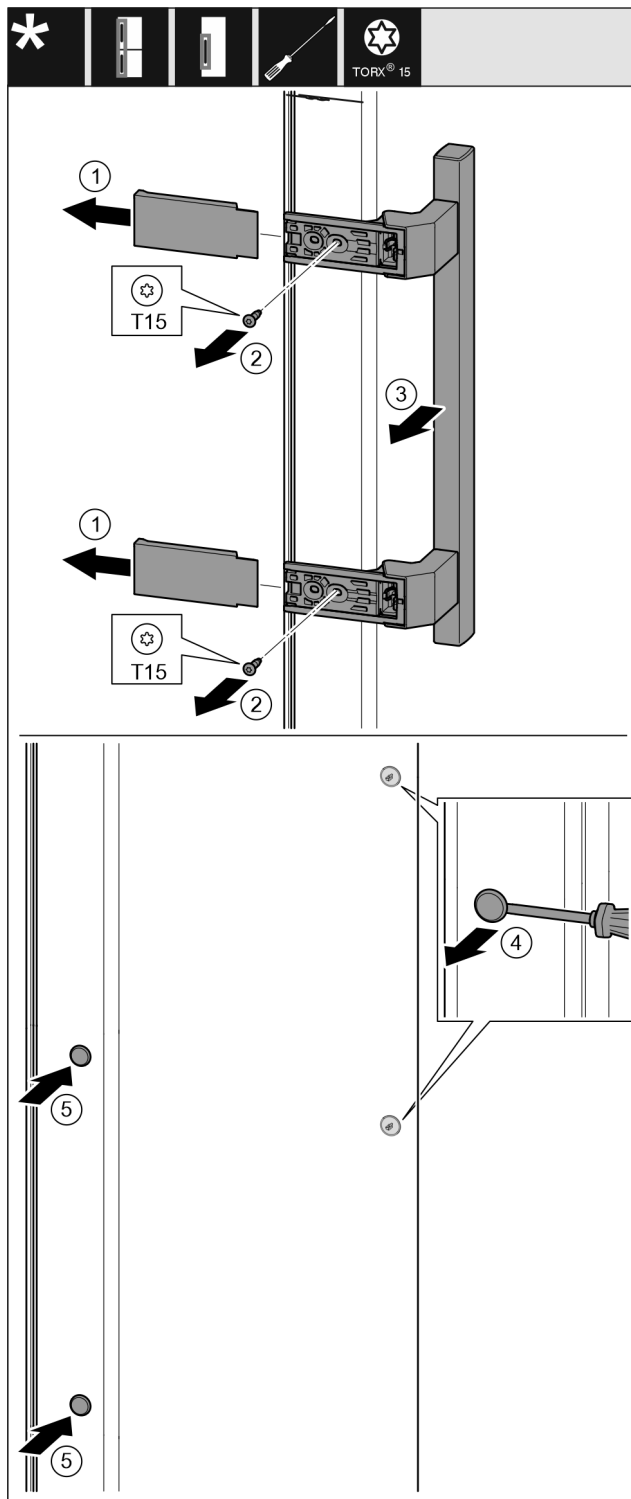


Fig. 39

- Pull off the cover. Fig. 39 (1)
- Remove the screws with a T15 screwdriver. Fig. 39 (2)
- Take off the handle. Fig. 39 (3)
- Carefully lift up the side plugs with a slotted screwdriver and pull them out. Fig. 39 (4)
- Insert the plugs again on the other side. Fig. 39 (5)

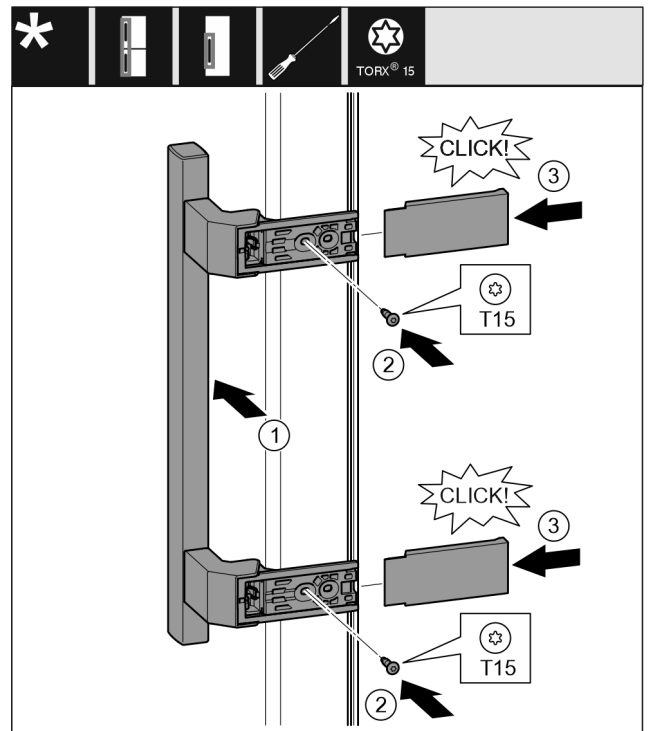


Fig. 40

- Position the handle on the other side. Fig. 40 (1)
- The screw holes must be exactly above each other.
- Tighten the screw with a T15 screwdriver. Fig. 40 (2)
- Position the covers on the side and push them on. Fig. 40 (3)
- Ensure that they latch into place.

14.11 Fitting the bottom door

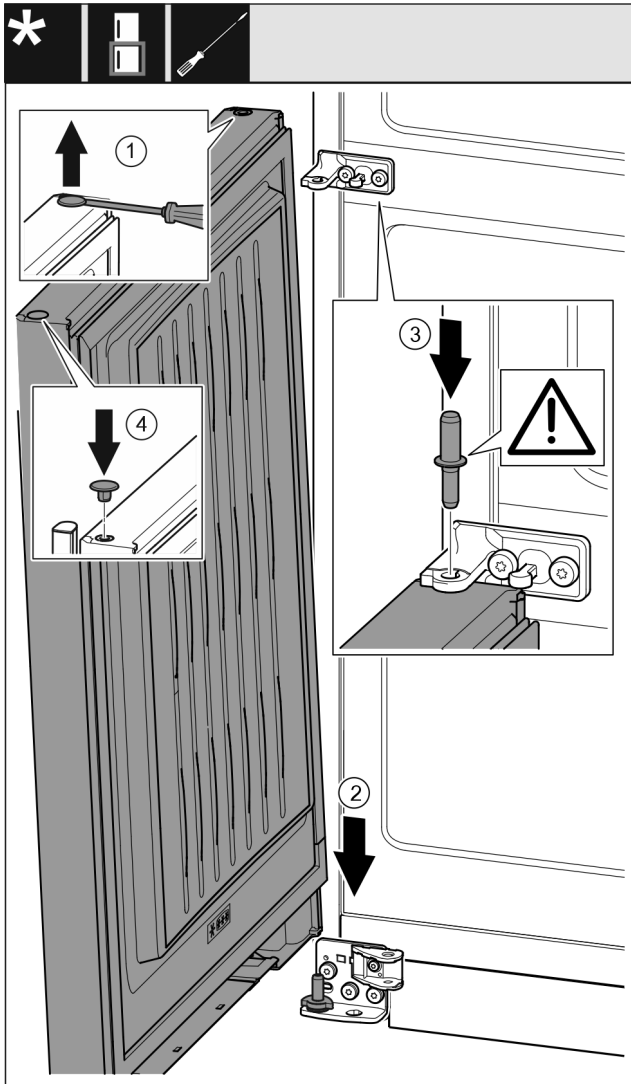


Fig. 41

- Carefully lift up the plugs with a slotted screwdriver and pull them out. Fig. 41 (1)
- Place the door onto the lower bearing pins from above. Fig. 41 (2)
- Insert the centre bearing pin through the centre bearing bracket into the lower door. Make sure that the latching lug is pointing to the rear. Fig. 41 (3)
- Insert the plugs again on the other side of the door. Fig. 41 (4)

14.12 Fitting the top door

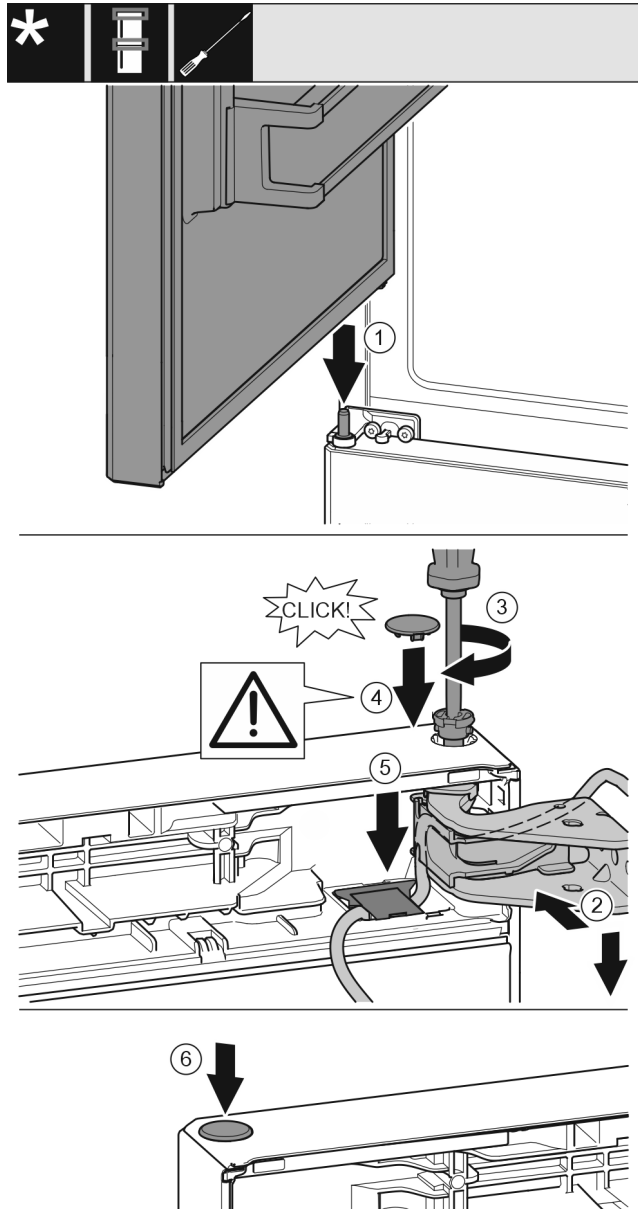


Fig. 42

- Place the upper door on the centre bearing pins Fig. 42 (1)
- Align the top of the door with opening in the bearing bracket. Fig. 42 (2)
- Insert the bolt and tighten with a T15 screwdriver. Fig. 42 (3)
- Fit the protective cover to protect the door: Insert the protective cover and check that it is flush to the door. If not, insert the bolt fully. Fig. 42 (4)

NOTICE

Cable crushing

- The marking on the cable must lie centrally in the holder. The lug with the longer opening must point forwards.
- Place on the cover and press it down until it latches into place. Fig. 42 (5)
- Insert the plugs. Fig. 42 (6)

Door hinge change

14.13 Fitting the cable connection

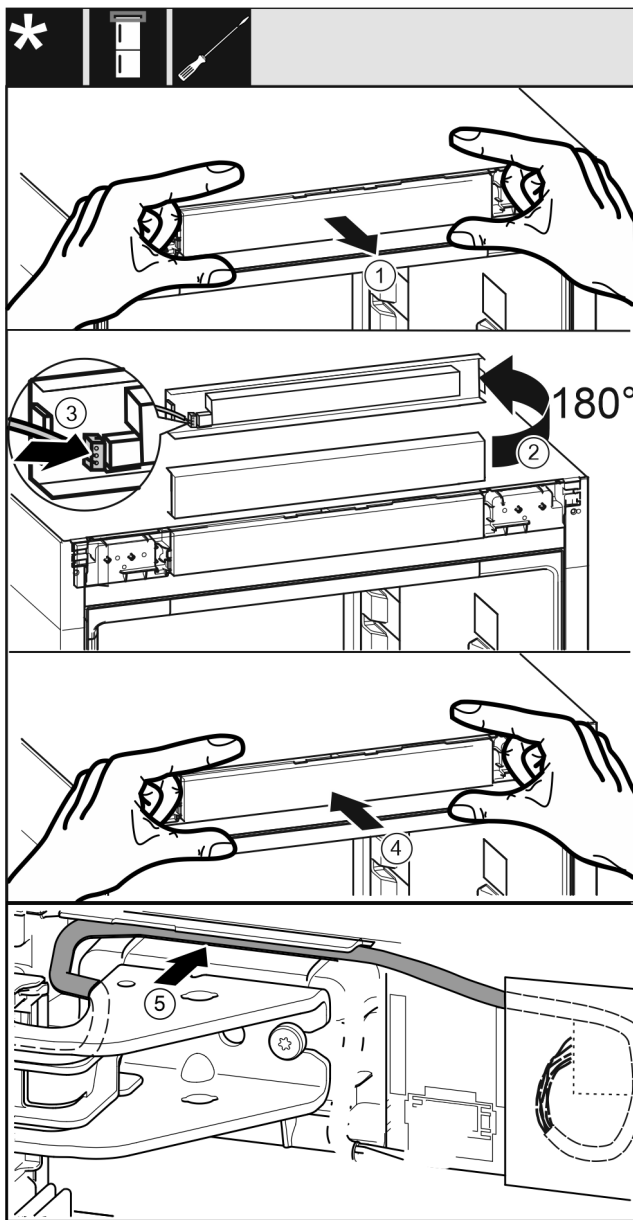


Fig. 43

- Take off the operating panel carefully. Fig. 43 (1)
- Turn the panel upwards through 180°. Fig. 43 (2)
- Engage the plug in the control panel. Fig. 43 (3)
- Latch the control panel back into the appliance. Fig. 43 (4)
- Carefully position the grey cable in the guide above the top bearing bracket. Fig. 43 (5)

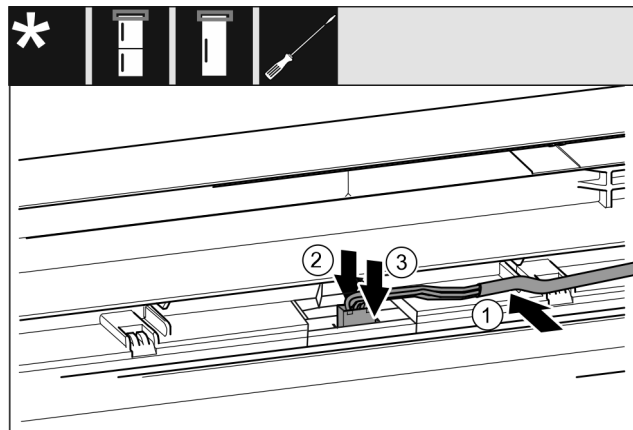


Fig. 44

- Insert the grey cable into the guide in the top door. Fig. 44 (1)
- Press back the latching lug Fig. 44 (2)
- Engage the plug. Fig. 44 (3)
- Position the remaining cable length as a loop in the guide, if required.

14.14 Aligning the doors



WARNING

Danger of injury due to door falling out!

If the bearing parts are not screwed on tightly enough, the door may fall out. This can result in serious injuries. In addition, the door may not close with the result that the appliance does not cool properly.

- Screw the bearing brackets on tightly using 4 Nm .
- Check all screws and retighten them if necessary.
- Align the doors flush with the appliance housing using the two slots in the lower bearing bracket and centre bearing bracket if needed. To do this undo the middle screw in the bottom bearing bracket with the T20 tool supplied. Undo the remaining screws a little with the T20 tool or with a T20 screwdriver and align using the slotted holes. Undo the screws in the middle bearing bracket with the T20 tool and align the middle bearing bracket using the slotted holes.
- Prop up the door: Take off the adjustable foot on the bearing bracket using the open-ended wrench SW10 until it comes into contact with the floor, then turn an additional 90°.

14.15 Fitting the bottom soft stop mechanism

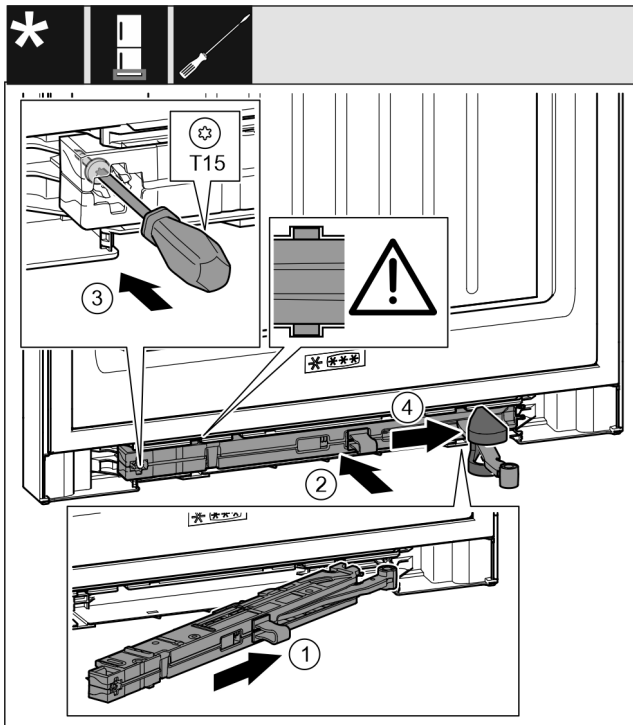


Fig. 45

- ▶ Slide the soft stop unit on the bearing bracket side at an angle into the slot as far as it will go. Fig. 45 (1)
- ▶ Slide the soft stop unit fully into the slot. Fig. 45 (2)
- ▶ The unit is positioned correctly when the rib on the soft stop unit is in the guide.
- ▶ Tighten the screw with a T15 screwdriver. Fig. 45 (3)
- ▶ Push the cover over the hinge. Fig. 45 (4)

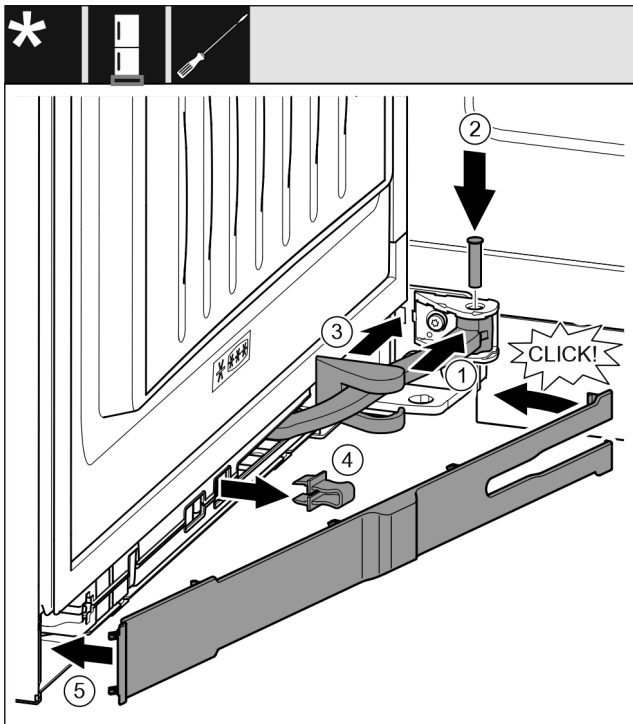


Fig. 46

- ▶ The door is open 90°
- ▶ Turn the hinge in the mount. Fig. 46 (1)
- ▶ Insert the bolt with a T15 screwdriver in the mount and hinge. Make sure that the latching lug sits correctly in the groove. Fig. 46 (2)

- ▶ Push the bearing bracket cover along the hinge and fit it via the mount. Fig. 46 (3)
- ▶ Remove the locking device. Fig. 46 (4)
- ▶ Position the panel on the handle and swing it in. Fig. 46 (5)
- ▶ The panel is latched into place.
- ▶ Close the bottom door.

14.16 Fitting the top soft stop mechanism

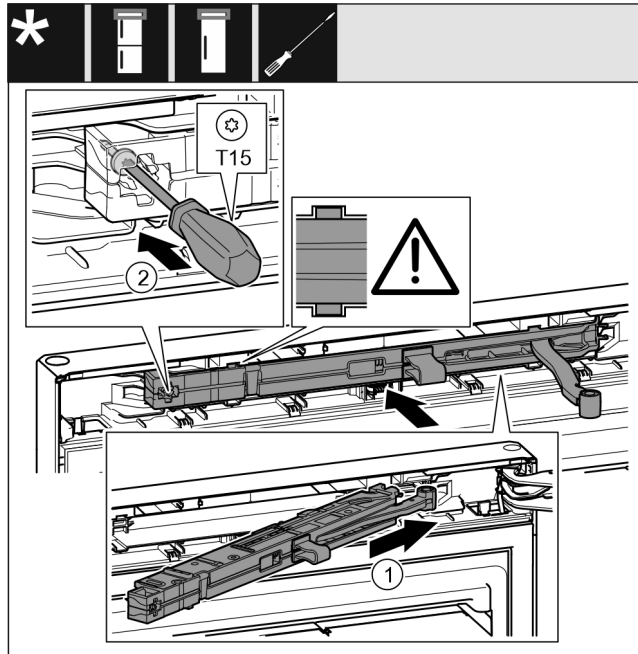


Fig. 47

- ▶ Slide the soft stop unit on the bearing bracket side at an angle into the slot as far as it will go. Fig. 47 (1)
- ▶ Slide the unit in completely.
- ▶ The unit is positioned correctly when the rib on the soft stop unit is in the guide in the housing.
- ▶ Tighten the screw with a T15 screwdriver. Fig. 47 (2)

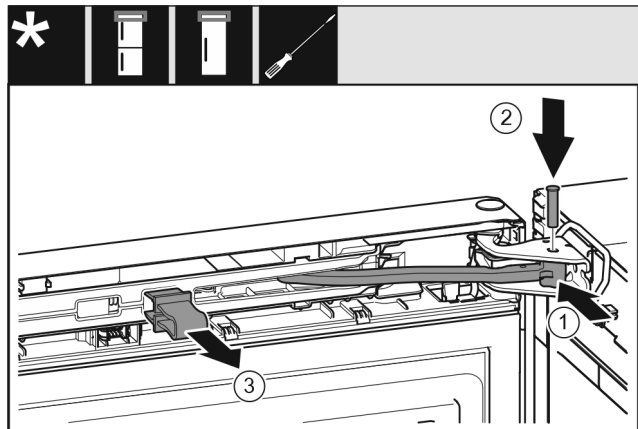


Fig. 48

- ▶ The door is open 90°.
- ▶ Turn the hinge in the bearing bracket. Fig. 48 (1)
- ▶ Insert the bolt in the bearing bracket and hinge. Make sure that the latching lug sits correctly in the groove. Fig. 48 (2)
- ▶ Remove the locking device. Fig. 48 (3)

Water connection*

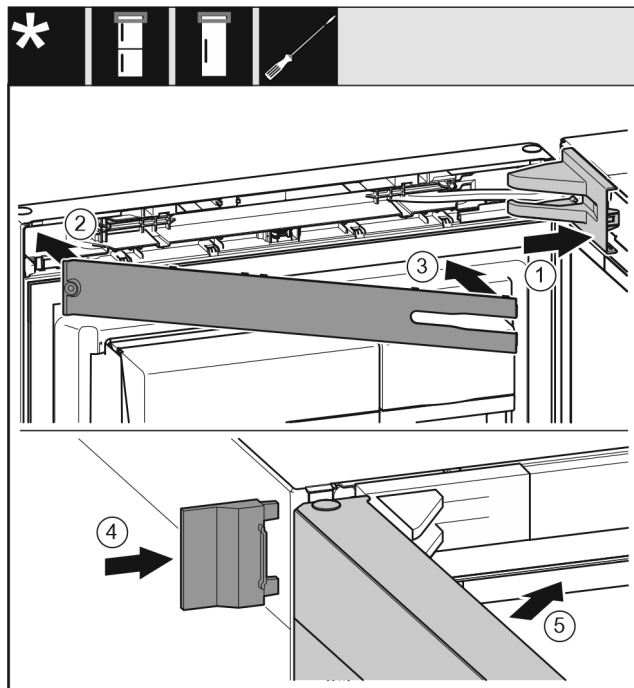


Fig. 49

- Position the bearing bracket cover and latch it in place. If necessary push it apart carefully. Fig. 49 (1)
- Position the panel. Fig. 49 (2)
- Swing in the panel and latch it into place. Fig. 49 (3)
- Slide on the outer cover. Fig. 49 (4)
- Close the upper door. Fig. 49 (5)

15 Water connection*



WARNING

Electricity in combination with water!
Electric shock.

- Before connecting to the water pipe: Disconnect the appliance from the mains.
- Before connecting to water supply lines: Shut off the water supply.
- The connection to the drinking water mains may only be carried out by a qualified gas and water engineer.



WARNING

Unclean water!
Contaminants.

- Only connect to the drinking water supply.

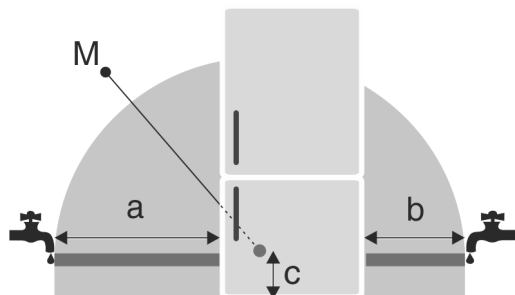


Fig. 50 *

For 600 mm wide appliances:*

a*	b*	c*	M*
~ 1150 mm	~ 1000 mm	~ 150 mm	Solenoid valve

For 750 mm wide appliances:*

a*	b*	c*	M*
~ 1075 mm	~ 925 mm	~ 150 mm	Solenoid valve

The appliance's water connection and inlet solenoid valve are suitable for a water pressure of up to 1 MPa (10 bar).

Specifications for proper operation (flow rate, ice cube size, noise level):

Water pressure:

bars	MPa
1.5 - 6.2	0.15 - 0.62

Water pressure when using the water filter:

bars	MPa
2.8 - 6.2	0.28 - 0.62

If the pressure exceeds 0.62 MPa (6.2 bar): Activate the pressure reducer first.

Ensure that the following conditions are met:

- ☐ Water pressure is maintained.
- ☐ Water is supplied to the appliance via a cold water pipe which can withstand the operating pressure and is connected to the drinking water supply.
- ☐ Enclosed hose is used. Old hoses are disposed of.*
- ☐ A filter with a seal is located in the hose connector.*
- ☐ A stopcock must be provided between the hose line and the domestic water connection to cut off the water supply if necessary.*
- ☐ The stopcock must be located outside the back of the appliance and within easy reach so that the appliance can be placed as far back as possible and the stopcock can be turned off quickly. Distances are adhered to.
- ☐ All devices and equipment used to supply water must comply with the regulations in force in the respective country.
- ☐ The rear of appliance is accessible so that you can connect the appliance to the drinking water supply.
- ☐ Do not damage or kink the hose during installation.

Note

Different sized hoses are available as optional accessories.*

16 Connecting the water supply*

Connecting the hose to the appliance

The solenoid valve is at the bottom on the back of the appliance. It has a R3/4 connecting thread.

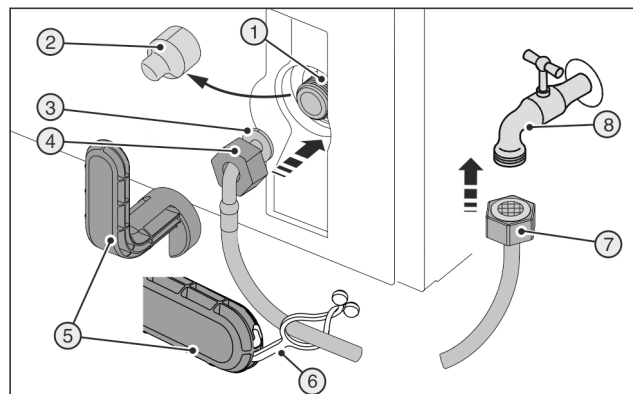


Fig. 51 *

- Remove the cover Fig. 51 (2).

- ▶ Easy to fit: Place the straight end of the hose *Fig. 51 (7)* to the left on the floor.
- ▶ Slide the nut *Fig. 51 (4)* over the angled end of the hose *Fig. 51 (3)* up to the end and secure.

NOTICE

Damaged solenoid thread pitch.

The solenoid leaks: Water may leak out.

- ▶ Locate the nut *Fig. 52 (1)* carefully and screw onto the thread.

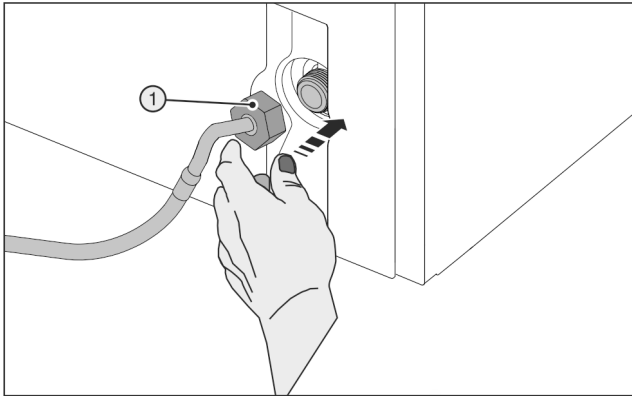


Fig. 52

- ▶ Position the nut *Fig. 52 (1)* carefully and screw it directly onto the thread with two fingers until it is seated securely.



WARNING

Broken auxiliary tool *Fig. 51 (5)*.

Cuts.

- ▶ Only use an auxiliary tool *Fig. 51 (5)* at room temperature.
- ▶ Tighten the nut *Fig. 52 (1)* clockwise with the auxiliary tool *Fig. 51 (5)* until maximum torque is reached and the auxiliary tool *Fig. 51 (5)* overtightens.

Connecting the hose to the stopcock

- ▶ Screw the nut *Fig. 51 (7)* onto the stopcock *Fig. 51 (8)*.



WARNING

Broken auxiliary tool *Fig. 51 (5)*.

Cuts.

- ▶ Only use an auxiliary tool *Fig. 51 (5)* at room temperature.
- ▶ Tighten the nut *Fig. 51 (7)* clockwise with the auxiliary tool *Fig. 51 (5)* until maximum torque is reached and the auxiliary tool *Fig. 51 (5)* overtightens.
- ▶ Hook the clip *Fig. 51 (6)* into the stopcock *Fig. 51 (8)* and fix it to the stainless steel pipe to store it.

Check the water system

- ▶ Slowly open the stopcock *Fig. 51 (8)*.
- ▶ Check the entire water system for tightness.
- ▶ Clean the IceMaker (see User Guide, Maintenance).

Air the water system

Airing is required in the following cases:

- Initial operation
- Replacing the InfinitySpring water tank

Ensure that the following conditions are met:

- Appliance is properly connected
- Water tank is inserted (see User Guide, Maintenance)
- Water filter is in place (see the User Guide, Maintenance)
- Appliance is on
- ▶ Opening the appliance door
- ▶ Press your drinking glass or cup against the lower part of the InfinitySpring dispenser.

- ▷ The top part moves out and air or water pours into the glass.
- ▶ Continue until the water flows evenly into the glass.
- ▷ There is no more air in the system.
- ▶ InfinitySpring Cleaning (see the User Guide, Maintenance).

17 Water filter

Depending on your model, the water filter is behind the lowest drawer in the fridge or BioFresh compartment.

It filters out deposits in the water and reduces the taste of chlorine.

- Replace the water filter at least every 6 months, or if there is a significant reduction in the flow rate.
- The water filter contains carbon and can be disposed of with the regular household waste.

Note

You can purchase the water filter from the [Liebherr household appliance store](http://home.liebherr.com) (home.liebherr.com).

17.1 Inserting the water filter

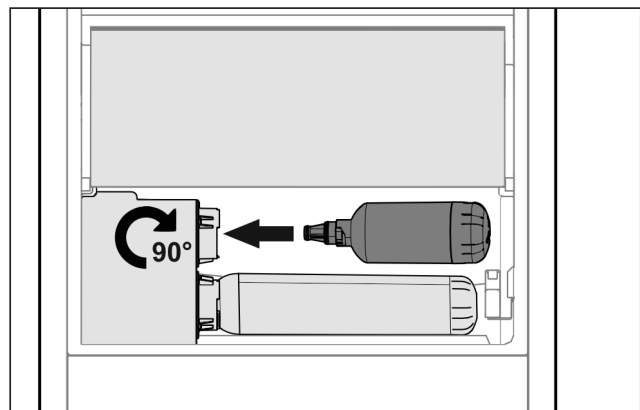


Fig. 53

- ▶ Remove the drawer compartment.
- ▶ Insert the water filter and rotate approx. 90° clockwise until it clicks in.
- ▶ Check that the filter is sealed and no water leaks out.
- ▶ Insert the drawer compartment.



CAUTION

New water filters can contain suspended matter.

- ▶ Draw 3 l of water from the InfinitySpring and dispose of it.

- ▷ The water filter is now ready for use.

18 Connecting device



WARNING

Failure to connect properly

Fire hazard.

- ▶ Do not use an extension cable.
- ▶ Do not use distributor blocks.

Connecting device

NOTICE

Failure to connect properly
Damage to the electronics.

- ▶ Do not connect the appliance to a stand-alone inverter, e.g. solar power systems and petrol generators.
- ▶ Do not use an energy saving plug.

Note

Only use the supplied mains cable.

- ▶ A longer mains cable can be ordered from Customer Service.

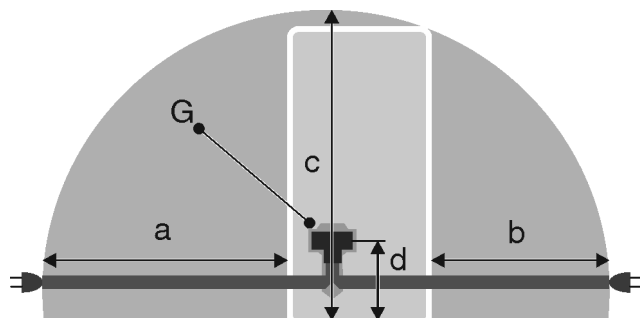


Fig. 54 *

For 600 mm wide appliances:*

a*	b*	c*	d*	G*
~ 1800 mm	~ 1400 mm	~ 2100 mm	~ 200 mm	Appliance plug

For 750 mm wide appliances:*

a*	b*	c*	d*	G*
~ 1725 mm	~ 1325 mm	~ 2100 mm	~ 200 mm	Appliance plug

Ensure that the following conditions are met:

- The type of current and voltage at the installation site match the information on the serial tag .
- The socket is earthed according to the regulations and fused.
- The fuse tripping current is between 10 and 16 A.
- The socket is easily accessible.
- The socket is not located behind the appliance but in areas a or b Fig. 54 (a, b, c).
- ▶ Check the electrical connection.
- ▶ Insert the appliance plug Fig. 54 (G) into the back of the appliance. Ensure that they latch into place.
- ▶ Connect the mains plug to the power supply.
- ▷ The Liebherr logo appears on the screen.
- ▷ The display switches to the standby symbol.



home.liebherr.com/fridge-manuals

EN fridge/freezer

Issue date: 20221201

Part number index: 7082964-00

Liebherr-Hausgeräte Marica EOOD
Bezirk Plovdiv
4202 Radinovo
Bulgarien